


Impervite® Shell and Tube Exchanger

MODEL NOMENCLATURE

Series	Shell Diameter (Inches)	Tube length (inches)
S – 7/8" ID tubes		
L – 1.5" ID tubes		

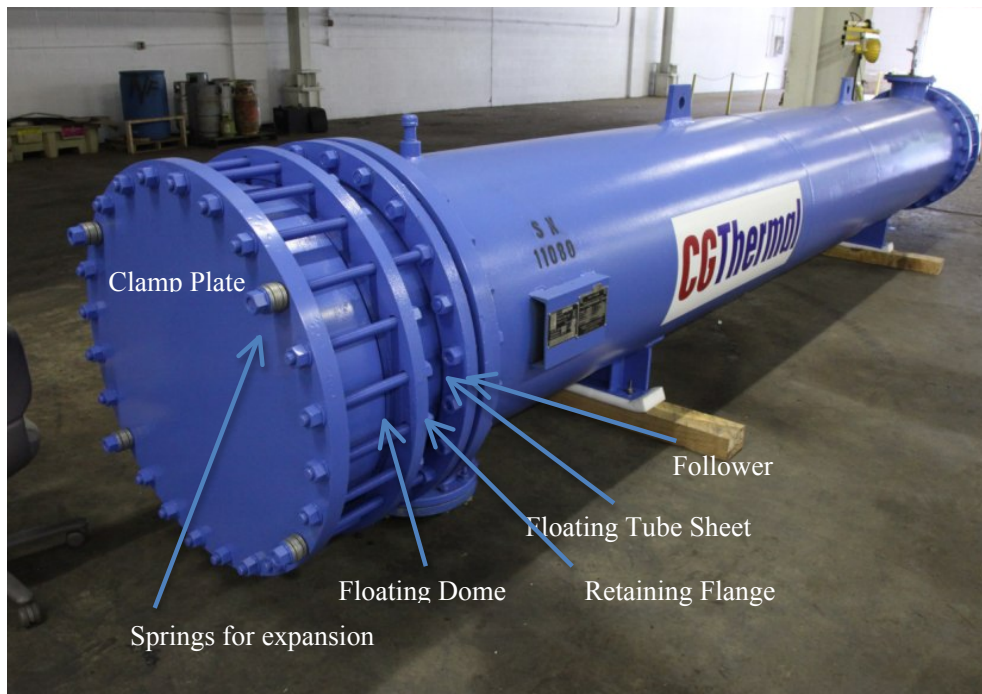

FEATURES

- Skirted floating tubesheet design
- Fully graphitized tubes maximizes tube life and thermal performance
- Up to 15,000 Ft² of heat transfer area
- Maximum tube length of 27'
- Maximum operating temperature of 340 Deg F
- Maximum design pressure of 100 psig. 75 psig standard

CG Thermal, LLC.
8950 Dutton Dr. Twinsburg, Ohio, USA 44087
Phone: 330-787-0101 – Fax: 330-487-0304
www.cgthermal.com